

CCSEW Series Cast Control Centers

Explosionproof, Dust-Ignitionproof

Class I, Div. 1 & 2 Groups B₀, C₀, D
 Class II, Div. 1 & 2 Groups E, F, G
 Class III, NEMA 4, 7BCD, 9EFG

Application

- Explosionproof control centers are used where hazardous materials are handled or stored. Grouping push buttons, switches, pilot devices and glass lenses in one enclosure will satisfy a wide range of control applications. This is most beneficial when having areas with minimum space or needing to centralize all controls in one area.

Features

- Sand cast copper-free aluminum.
- Precision machined flame path between body and cover.
- Bolt on stainless steel slotted mounting feet.
- Flexible hinge mounting on either side. **Hinges standard on 121206 & above.**
- External flange maximizes internal space.
- Wall thickness suitable for minimum of five full threads.
- Factory assembled and wired to specifications.
- Operators are spaced on 2½" centers.
- All push buttons and selector switches have stainless steel shafts.
- Push button and selector switches are rated 600 VAC.
- Pilot lights are rated 6V up to 600V with transformer.
- Square and round windows available in a wide range of sizes.
- Drilled and tapped for mounting pan.
- Ground lug package and installation instructions for termination of ground wires enclosed.
- O-ring gasket insures watertight integrity.

Standard Materials

- Bodies and covers: copper-free aluminum
- Cover bolts: stainless steel
- O-Ring: Neoprene

Standard Finish

- Bodies and covers: Shot blast finish standard.



Options

- Grey epoxy powder coat available to provide NEMA 4X rating. (-G2 Suffix)
- Drilling and Tapping

Compliances

- UL Classified - Standard 1203 and 1604
- CSA Certified - Standard C22.2, No. 30
- NEMA 4

CCSEW Series Selection Table

Catalog Number	Overall Dimensions			Mounting Dimensions				Inside Dimensions				Flat Mach. Space		Conduit Area			K
	F	E	G	A	A*	B	B*	W	H	Db	Dc	Q	P	L	N	M	
CCSEW050903	8.94	13.50	6.13	4.00	N/A	11.00	N/A	5.06	9.50	3.50	1.13	9.13	4.63	9.00	4.56	2.56	2.00
CCSEW060804	10.40	12.40	6.50	4.56	9.13	10.56	4.50	6.00	8.00	3.75	0.75	6.25	4.25	6.75	4.75	2.25	2.50
CCSEW061004	10.63	15.25	6.75	5.50	N/A	13.13	N/A	6.13	10.75	3.81	1.44	10.38	5.75	9.94	5.38	2.19	2.00
CCSEW061204	10.63	16.63	6.38	N/A	9.13	N/A	8.50	6.13	12.13	4.06	1.00	10.13	4.13	11.00	5.00	2.31	2.25
CCSEW061604	11.00	20.50	6.88	6.00	N/A	18.00	N/A	6.50	16.00	4.13	1.38	13.06	5.50	15.13	5.63	2.25	2.31
CCSEW071106	12.25	15.88	10.00	6.38	N/A	13.50	N/A	7.38	11.38	5.88	2.50	10.94	7.44	9.75	6.25	4.13	3.38
CCSEW080806	12.25	12.25	8.25	4.50	10.75	10.75	4.50	8.00	8.00	5.75	0.75	6.25	6.25	5.75	5.75	3.75	3.25
CCSEW081006	12.50	14.50	8.50	7.00	10.75	12.50	6.50	8.00	10.00	5.75	0.75	8.25	6.25	8.51	6.25	4.00	3.50
CCSEW081307	12.50	17.44	10.38	N/A	10.00	N/A	8.50	8.00	13.06	3.50	3.50	14.19	9.00	11.25	6.31	1.75	2.75
CCSEW091105	13.88	15.50	8.69	7.25	11.82	13.13	8.56	9.38	11.13	4.81	1.88	11.13	9.38	9.38	7.63	3.25	3.25
CCSEW091504	14.25	20.44	8.50	7.25	11.81	17.88	13.31	9.50	15.56	4.75	1.75	12.38	6.25	14.28	7.88	3.50	3.00
CCSEW101006	14.81	14.81	9.13	6.50	N/A	13.00	N/A	10.25	10.25	5.75	1.50	7.19	7.19	7.06	7.06	3.00	3.38
CCSEW101406	14.50	18.50	8.44	7.00	13.00	16.63	10.63	10.00	14.00	5.88	0.75	12.75	8.75	12.25	8.25	3.31	3.13
CCSEW101408	14.50	18.50	9.63	N/A	13.00	N/A	10.63	10.00	14.00	7.75	0.75	12.75	8.75	12.25	8.25	6.19	4.44
CCSEW112005	16.38	25.13	7.50	10.25	14.50	22.63	16.88	11.38	20.00	4.88	1.50	17.06	8.38	17.81	9.38	2.50	3.50
CCSEW112406	15.75	29.38	10.19	8.50	14.13	27.13	20.00	10.75	24.38	6.00	1.63	21.38	7.75	22.63	9.13	4.19	4.00
CCSEW113006	16.38	35.00	10.25	9.50	15.13	32.88	27.25	11.25	29.88	6.19	1.88	26.25	7.63	27.63	9.06	4.06	4.19
CCSEW121206	17.38	17.38	9.25	8.63	15.63	15.63	8.63	12.25	12.25	5.75	1.50	9.25	9.25	10.50	10.50	3.75	3.75
CCSEW121208	17.38	17.38	11.50	8.63	15.63	15.63	8.63	12.25	12.25	7.75	1.50	9.25	9.25	10.50	10.50	6.06	4.75
CCSEW121806	17.00	23.00	9.13	7.00	15.75	21.00	14.13	12.25	18.25	5.75	1.50	15.25	9.25	15.06	9.06	3.00	3.50
CCSEW121808	17.00	23.00	11.13	7.00	15.75	21.00	14.13	12.25	18.25	8.75	1.50	15.25	9.25	15.06	9.06	5.00	4.25
CCSEW122408	16.75	28.75	11.13	N/A	15.75	N/A	18.38	12.00	24.00	7.75	1.00	22.00	10.00	21.94	9.75	5.50	4.25
CCSEW123608	16.75	40.75	1.88	N/A	15.75	N/A	29.00	12.00	36.00	7.75	1.50	33.25	9.50	34.38	9.38	5.50	4.56
CCSEW133806	18.00	42.50	10.44	16.13	11.88	40.75	33.75	13.63	37.88	6.13	1.50	35.13	10.63	35.75	11.50	3.88	4.31
CCSEW141406	19.38	19.38	9.56	9.75	17.75	17.75	9.75	14.75	14.75	5.75	1.38	11.00	11.00	12.50	12.50	3.50	3.88
CCSEW141408	19.38	19.38	11.56	9.75	17.75	17.75	9.75	14.75	14.75	7.75	1.38	11.00	11.00	12.50	12.50	5.50	4.00
CCSEW142408	19.63	29.00	12.00	13.13	N/A	27.50	N/A	14.88	24.25	8.00	1.50	21.25	11.88	22.00	12.63	6.13	4.00
CCSEW153707	21.25	43.00	12.06	13.75	20.00	41.63	32.00	15.63	37.25	7.44	1.50	34.00	15.38	35.06	13.38	4.94	5.25
CCSEW161606	21.00	21.00	9.81	11.00	19.75	19.75	11.00	16.50	16.50	5.75	1.50	13.25	13.25	14.00	14.00	3.50	3.88
CCSEW161608	21.00	21.00	12.39	11.00	19.75	19.75	11.00	16.50	16.50	8.38	1.50	13.25	13.25	14.00	14.00	6.13	4.88
CCSEW161812	21.38	23.38	15.06	12.00	19.00	21.00	14.00	16.25	18.25	11.88	0.38	16.75	14.75	16.13	14.00	9.94	7.00
CCSEW162206	21.50	27.31	9.06	13.00	19.88	25.25	15.50	16.44	22.50	5.75	1.25	19.00	13.00	19.56	13.56	2.25	3.31
CCSEW162408	21.00	28.00	12.13	N/A	19.75	N/A	18.38	16.25	24.25	8.25	1.50	21.25	13.25	22.00	14.00	6.00	5.31
CCSEW162806	20.75	32.75	8.63	13.00	N/A	30.75	N/A	16.25	28.25	5.75	1.50	25.25	13.25	25.06	13.06	1.75	3.13
CCSEW181806	23.38	23.38	9.94	13.00	21.75	21.75	13.00	18.25	18.25	5.75	1.50	15.25	15.25	16.00	16.00	3.50	4.13
CCSEW181808	23.38	23.38	11.94	13.00	21.75	21.75	13.00	18.25	18.25	7.75	1.50	15.25	15.25	16.00	16.00	5.50	4.50
CCSEW182408	23.94	30.00	12.18	16.13	21.75	27.75	18.38	18.25	24.19	7.75	1.50	21.25	15.25	21.75	15.75	5.50	5.06
CCSEW182410	23.94	30.00	14.18	16.13	21.75	27.75	18.38	18.25	24.19	9.75	1.50	21.25	15.25	21.75	15.75	7.50	5.75
CCSEW183008	22.63	34.63	12.13	N/A	21.75	N/A	23.00	18.25	30.25	7.75	1.50	27.25	15.25	28.00	16.00	5.50	4.75
CCSEW183608	23.50	41.75	12.31	11.00	21.75	39.50	29.00	18.25	36.50	7.75	1.50	33.50	14.50	34.13	15.81	5.50	4.75
CCSEW183610	23.50	41.75	14.31	11.00	21.75	39.50	29.00	18.25	36.50	9.75	1.50	33.50	14.50	34.13	15.81	7.50	5.50
CCSEW184207	23.88	47.88	11.88	16.00	23.00	45.38	38.38	18.63	42.25	7.00	1.50	39.25	15.63	40.88	17.13	5.00	5.00
CCSEW205610	26.00	56.00	17.63	N/A	21.56	N/A	38.63	20.00	56.00	5.00	5.00	57.00	7.00	Consult Factory			4.50
CCSEW206008	25.00	65.00	12.75	N/A	23.50	N/A	50.00	20.00	60.00	6.88	1.50	56.00	16.00	56.00	17.50	5.00	4.75
CCSEW242408	29.38	29.38	12.31	18.38	28.00	28.00	18.38	24.50	24.50	7.75	1.50	21.25	21.25	22.13	22.13	5.50	5.00
CCSEW242410	29.38	29.38	14.31	18.38	28.00	28.00	18.38	24.50	24.50	9.75	1.50	21.25	21.25	22.13	22.13	7.50	6.13
CCSEW243008	29.00	35.00	13.00	18.00	28.00	34.00	23.00	24.00	30.00	8.00	1.94	25.88	19.88	27.38	21.38	5.94	5.25
CCSEW243608	30.75	43.00	13.06	18.25	28.00	40.00	29.00	24.25	36.25	7.75	1.63	33.25	21.00	34.00	21.00	5.88	5.13
CCSEW243610	30.75	43.00	15.06	18.25	28.00	40.00	29.00	24.25	36.25	9.75	1.63	33.25	21.00	34.00	21.00	7.50	6.00
CCSEW303808	36.00	44.00	13.75	N/A	35.00	N/A	29.00	30.00	38.00	7.75	2.00	39.88	31.88	34.63	26.63	4.75	6.13
CCSEW303816	36.00	44.00	20.06	N/A	35.00	N/A	29.00	30.00	38.00	15.50	7.75	39.88	31.88	34.63	26.63	4.75	6.13

Note: Dimensions (in inches) are nominal.

◇ For Groups B and C, all conduits must be sealed within 2" of the enclosure.

Refer to page 14 for Dimensional Drawings. Refer to page 9 for Drill and Tap schedule to accompany order.

Visit our website at www.egs-curlee.com or

contact **Technical Services** at **(800) 631-6815** with any questions.

CCSEW Series

Selection Table


Catalog Number	Max Window Size Group B, C and D	Maximum Number of Operators‡	Number of Rows (Tall) (Wide)		Cover Thickness (Inches)	Max. Cond. Size (NPT)	Approx. Weight (lbs.)	Mounting Hardware Catalog Number
CCSEW050903	N/A	8	4	2	0.50	1.50	21	CMH2
CCSEW060804	N/A	6	3	2	0.75	2.00	20	CMH2
CCSEW061004	N/A	6	3	2	0.63	1.50	27	CMH2
CCSEW061204	N/A	8	4	2	0.63	2.00	25	CMH2
CCSEW061604	N/A	10	5	2	0.63	2.00	32	CMH2
CCSEW071106	3"	12	4	3	0.75	2.00	35	CMH2
CCSEW080806	3"	9	3	3	0.75	2.00	30	CMH2
CCSEW081006	3"	6	3	2	0.75	2.00	36	CMH2
CCSEW081307	3"	15	5	3	0.75	2.00	30	CMH2
CCSEW091105	4"	16	4	4	0.69	2.00	22	CMH2
CCSEW091504	3"	15	5	3	0.75	2.00	33	CMH2
CCSEW101006	4"	6	3	2	0.75	2.00	44	CMH2
CCSEW101406	4"	20	5	4	0.75	2.00	55	CMH4
CCSEW101408	4"	20	5	4	0.75	4.00	60	CMH2
CCSEW112005	4"	21	7	3	0.88	3.00	85	CMH8
CCSEW112406	4"	27	9	3	0.88	3.00	72	CMH8
CCSEW113006	(2) 4"	33	11	3	0.88	3.00	113	CMH8
CCSEW121206	4"	12	4	3	0.75	3.00	65	CMH8
CCSEW121208	4"	12	4	3	0.75	3.50	70	CMH8
CCSEW121806	4"	18	6	3	0.75	4.00	90	CMH5
CCSEW121808	4"	18	6	3	0.75	4.00	101	CMH5
CCSEW122408	4"	27	9	3	1.00	4.00	138	CMH4
CCSEW123608	(3) 5"	39	13	3	1.13	4.00	218	CMH5
CCSEW133806	(3) 5"	56	14	4	1.00	3.50	190	CMH8
CCSEW141406	5"	16	4	4	0.75	3.50	98	CMH8
CCSEW141408	5"	16	4	4	0.75	3.00	105	CMH8
CCSEW142408	7"	40	8	5	1.00	4.00	131	CMH6
CCSEW153707	(2) 9"	65	13	5	1.13	4.00	250	CMH8
CCSEW161606	9"	25	5	5	1.00	3.50	132	CMH8
CCSEW161608	9"	25	5	5	1.00	4.00	140	CMH8
CCSEW161812	9"	42	7	6	1.25	4.00	150	CMH8
CCSEW162206	9"	35	7	5	1.25	3.00	130	CMH8
CCSEW162408	9"	40	8	5	1.06	4.00	180	CMH6
CCSEW162806	(2) 9"	50	10	5	1.00	3.00	150	CMH8
CCSEW181806	9"	36	6	6	0.94	3.50	188	CMH8
CCSEW181808	9"	36	6	6	0.94	4.00	198	CMH8
CCSEW182408	9"	48	8	6	1.31	4.00	224	CMH8
CCSEW182410	9"	48	8	6	1.31	4.00	235	CMH8
CCSEW183008	(2) 9"	66	11	6	1.25	4.00	265	CMH5
CCSEW183608	(2) 9"	78	13	6	1.13	4.00	250	CMH8
CCSEW183610	(2) 9"	78	13	6	1.13	4.00	270	CMH8
CCSEW184207	(3) 9"	90	15	6	1.25	4.00	310	CMH8
CCSEW205610	7"	57	19	3	1.50	4.00	530	CMH8
CCSEW206008	(3) 9"	132	22	6	1.00	4.00	521	CMH6
CCSEW242408	9"	64	8	8	1.13	4.00	225	CMH8
CCSEW242410	9"	64	8	8	1.13	4.00	240	CMH8
CCSEW243008	(2) 7"	80	10	8	1.13	4.00	420	CMH8
CCSEW243608	(2) 9"	104	13	8	1.50	4.00	420	CMH5
CCSEW243610	(2) 9"	104	13	8	1.50	4.00	450	CMH5
CCSEW303808	(4) 9"	130	13	10	1.75	4.00	600	CMH6
CCSEW303816	(4) 9"	130	13	10	1.75	4.00	800	CMH6

Note: Due to the nature of the sand cast process, external dimensions are subject to vary +/- 1/8".

‡ With window installed consult factory for maximum number of operators.

CCSEW Series
Dimensions

Refer to **Previous Pages** for Dimension Labels

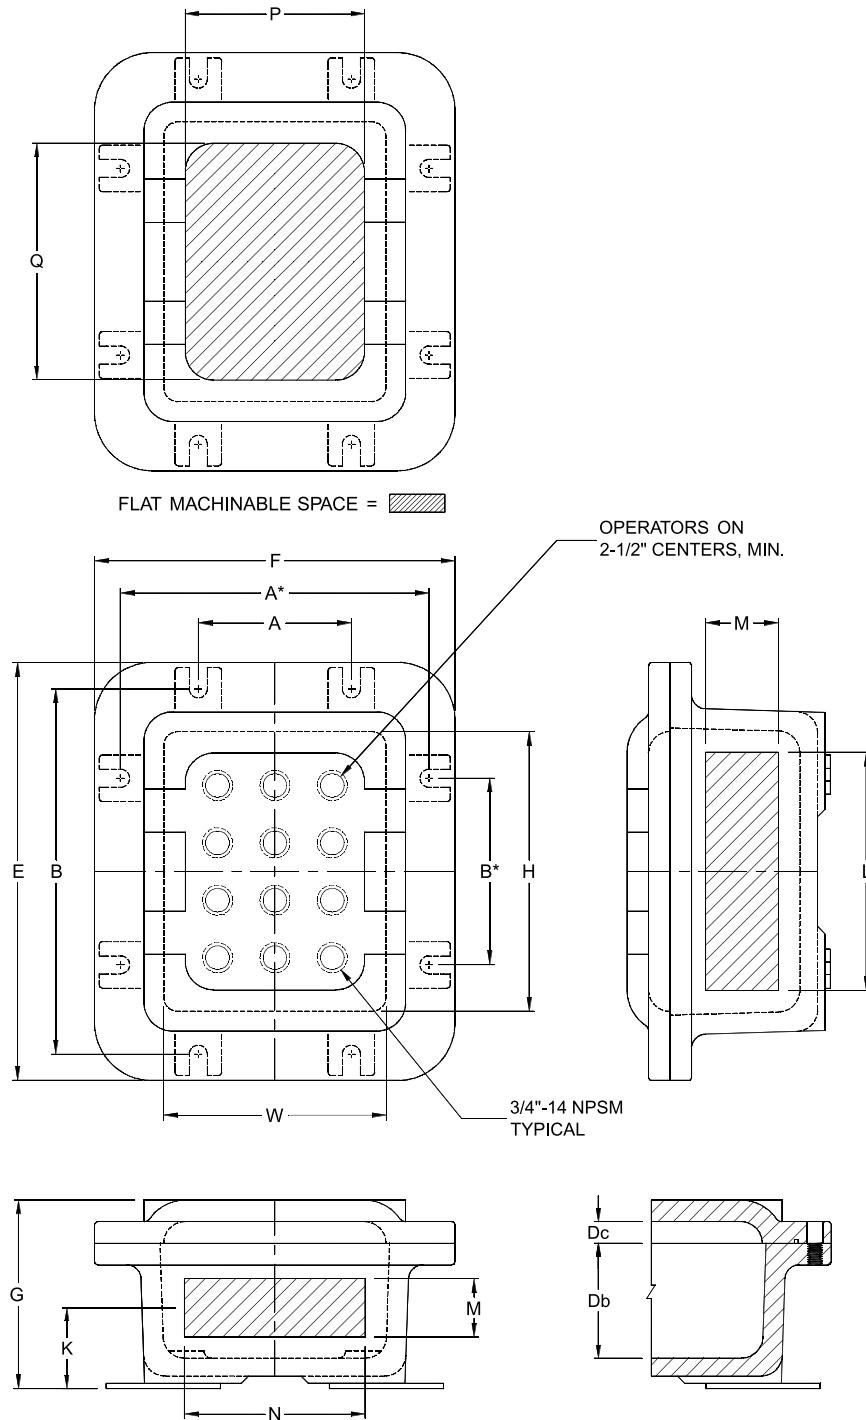

CCSEW Series

Options and Accessories

Class I, Div. 1 & 2 Groups B0, C0, D

Class II, Div. 1 & 2 Groups E, F, G

Class III, NEMA 4, 7BCD, 9EFG

Operators/Pilot Devices (Factory Installed)

Suffix	Description	Suffix	Description	Suffix	Description
A2X	2-Pos Selector Switch	L32	Clear Pilot Light, 240V	LP24X	Blue Lighted Push Button, 480V
A3X	3-Pos Selector Switch	L32G	Clear Pilot Light, 240V, Guarded	LP2X	Blue Lighted Push Button, 120V
A31X	Spring Return From Left to Center	L34	Clear Pilot Light, 480V	LP32X	Clear Lighted Push Button, 240V
A32X	Spring Return From Right to Center	L34G	Clear Pilot Light, 480V, Guarded	LP34X	Clear Lighted Push Button, 480V
A33X	Spring Return From Left & Right to Center	L3G	Clear Pilot Light, 120V, Guarded	LP3X	Clear Lighted Push Button, 120V
A34X	3-Pos Selector Switch - Key Operated	L4	Green Pilot Light, 120V	LP42X	Green Lighted Push Button, 240V
L1	Amber Pilot Light, 120V	L42	Green Pilot Light, 240V	LP44X	Green Lighted Push Button, 480V
L12	Amber Pilot Light, 240V	L42G	Green Pilot Light, 240V, Guarded	LP4X	Green Lighted Push Button, 120V
L12G	Amber Pilot Light, 240V, Guarded	L42G	Green Pilot Light, 240V, Guarded	LP52X	Red Lighted Push Button, 240V
L14	Amber Pilot Light, 480V	L44	Green Pilot Light, 480V	LP54X	Red Lighted Push Button, 480V
L14G	Amber Pilot Light, 480V, Guarded	L4G	Green Pilot Light, 120V, Guarded	LP5X	Red Lighted Push Button, 120V
L1G	Amber Pilot Light, 120V, Guarded	L5	Red Pilot Light, 120V	PO1	Potentiometer Operator, Short Barrel
L2	Blue Pilot Light, 120V	L52	Red Pilot Light, 240V	PO2	Potentiometer Operator, Long Barrel
L22	Blue Pilot Light, 240V	L52G	Red Pilot Light, 240V, Guarded	RS	Reset Button
L22G	Blue Pilot Light, 240V, Guarded	L52G	Red Pilot Light, 240V, Guarded	S1X	Start Button
L24	Blue Pilot Light, 480V	L54	Red Pilot Light, 480V	S2X	Stop Button
L24G	Blue Pilot Light, 480V, Guarded	L5G	Red Pilot Light, 120V, Guarded	S3X	Start/Stop Button
L2G	Blue Pilot Light, 120V, Guarded	LED	LED Pilot Lights	S4X	Emergency Stop
L3	Clear Pilot Light, 120V	LP12X	Amber Lighted Push Button, 240V	S5X	Emergency Stop, Maintained
		LP14X	Amber Lighted Push Button, 480V	S6X	Black Push Button, N.O.
		LP1X	Amber Lighted Push Button, 120V	S7X	Black Push Button, N.C.
		LP22X	Blue Lighted Push Button, 240V	S8X	Black Push Button, N.O./N.C.

Mounting Pans (Dimensions in inches)

Mounting Pan Catalog No.	Junction Box Catalog No.	Overall Dimension W	Overall Dimension H	Mounting Pan Catalog No.	Junction Box Catalog No.	Overall Dimension W	Overall Dimension H	Mounting Pan Catalog No.	Junction Box Catalog No.	Overall Dimension W	Overall Dimension H
CZ-593	CCSEW050903	3.50	8.50	CZ-12126/8	CCSEW121206	10.50	10.50	CZ-18186/8	CCSEW181806	16.00	16.00
CZ-684	CCSEW060804	4.50	6.50	CZ-12126/8	CCSEW121208	10.50	10.50	CZ-18186/8	CCSEW181808	16.00	16.00
CZ-6104	CCSEW061004	5.00	10.00	CZ-12186/8	CCSEW121806	10.50	16.50	CZ-18248/10	CCSEW182408	16.00	22.00
CZ-6124	CCSEW061204	5.50	11.00	CZ-12186/8	CCSEW121808	10.50	16.50	CZ-18248/10	CCSEW182410	16.00	22.00
CZ-6164	CCSEW061604	5.25	15.00	CZ-12248/10	CCSEW122408	10.75	22.63	CZ-18308	CCSEW183008	16.00	28.00
CZ-7116	CCSEW071106	6.50	10.00	CZ-12368	CCSEW123608	10.00	34.00	CZ-18368/10	CCSEW183608	17.00	34.75
CZ-886	CCSEW080806	6.50	6.50	CZ-13386	CCSEW133806	11.50	36.38	CZ-18368/10	CCSEW183610	17.00	34.75
CZ-8106	CCSEW081006	6.50	8.50	CZ-14146/8	CCSEW141406	12.25	12.25	CZ-18427	CCSEW184207	17.00	40.00
CZ-8137	CCSEW081307	6.00	11.00	CZ-14146/8	CCSEW141408	12.25	12.25	CZ-205610	CCSEW205610	17.00	54.00
CZ-9115	CCSEW091105	8.25	10.00	CZ-14248	CCSEW142408	14.00	22.38	CZ-20608	CCSEW206008	18.00	57.50
CZ-9154	CCSEW091504	8.13	14.75	CZ-15377	CCSEW153707	14.50	35.50	CZ-24248/10	CCSEW242408	22.00	22.00
CZ-10104/6	CCSEW101006	7.50	7.50	CZ-16166/8	CCSEW161606	15.00	15.00	CZ-24248/10	CCSEW242410	22.00	22.00
CZ-10146/8	CCSEW101406	9.00	13.00	CZ-16166/8	CCSEW161608	15.00	15.00	CZ-24308	CCSEW243008	22.50	28.00
CZ-10146/8	CCSEW101408	9.00	13.00	CZ-161812	CCSEW161812	15.00	16.00	CZ-24368/10	CCSEW243608	22.00	34.00
CZ-11205	CCSEW112005	10.50	19.00	CZ-16226	CCSEW162206	14.00	20.00	CZ-24368/10	CCSEW243610	22.00	34.00
CZ-11246	CCSEW112406	9.88	23.25	CZ-16248	CCSEW162408	14.75	22.75	CZ-30388	CCSEW303808	28.00	36.00
CZ-11306	CCSEW113006	9.88	28.50	CZ-16286	CCSEW162806	14.00	26.00	CZ-30388	CCSEW303816	28.00	36.00

CCSEW Series

Options and Accessories

Round Windows

Catalog Number	Description
CW5	3" Viewing Area, Round Group B
CW6	4" Viewing Area, Round Group B
CW7	5" Viewing Area, Round Group B
CW10	7" Viewing Area, Round Group B
CW12	9" Viewing Area, Round Group B

Factory Installed Suffix	Field Installed Catalog Number	Description
AB	N/A	Set of 4 standoffs 1/2" high
BR	BRTB4X	Breather, NEMA 4X (includes outlets & installation)
DN	DRNB4X	Drain, NEMA 4X (includes outlets & installation)
EGS	N/A	External grounding stud 3/8"-16
G1	N/A	Grey Powder Coat Epoxy (outside)
G2	N/A	Grey Powder Coat Epoxy (inside & outside)
H	CHOF12SS CHOF22SS CHOF23SS	Hinges stainless steel Hinge Kit, 2 light duty SS hinges Hinge Kit, 2 heavy duty SS hinges Hinge Kit, 3 heavy duty SS hinges
K	N/A	Terminal blocks 600V, 20A (indicate # of points) (example: 5 points = 5K)
NP	N/A	Plastic nameplate, 2" x 4", 1/8" black letters on white surface, 3 lines max, specify legend.
NPSM75	N/A	3/4" NPSM Drill & Tap
Q	N/A	SS captive Quad-Lead bolts
Z	See Table (page 23)	Mounting pan

Square Windows (Consult Factory)

Circuit Breaker Operators

Catalog Number	Description
CV1W	150AF Circuit Breaker Mechanism
CV2W	250AF Circuit Breaker Mechanism

Drill & Tap Options

(For Drill and Tap schedule, refer to page 9)

Symbol	Conduit Size (NPT)	Symbol	Conduit Size (NPT)
A	1/2"	F	2"
B	3/4"	G	2 1/2"
C	1"	H	3"
D	1 1/4"	J	3 1/2"
E	1 1/2"	K	4"

Suffix	Blind Tapped Holes	Screw Size
BT1		#6 - 1/4"
BT2		5/16" - 1/2"

Mounting Hardware†

Catalog Number	Description
CMH1	1/4" - 20 X 1 1/4" Bolt, 1/4" - 20 Hex Nut, 1/4" Washers
CMH2	3/8" - 16 X 1-1/4" Bolt, 3/8" - 16 Hex Nut, 3/8" Washers
CMH3	7/16" - 14 X 1 3/4" Bolt, 7/16" - 14 Hex Nut, 7/16" Washers
CMH4	1/2" - 13 X 1 3/4" Bolt, 1/2" - 13 Hex Nut, 1/2" Washers
CMH5	1/2" - 13 X 2" Bolt, 1/2" - 13 Hex Nut, 1/2" Washers
CMH6	5/8" - 11 X 2" Bolt, 5/8" - 11 Hex Nut, 5/8" Washers
CMH7	1/2" - 13 X 1 1/2" Bolt, 1/2" - 13 Hex Nut, 1/2" Washers
CMH8	5/8" - 11 X 1 1/4" Bolt, 5/8" - 11 Hex Nut, 5/8" Washers

†Refer to pages 12 and 13?? for mounting hardware and enclosure correlation.